


Slewing Drive Performance Parameters		
Rated Output Speed	<1.05rpm	
Output Torque	16500N.m	12178 lbf.ft
Tilting Moment	271 kN.m	200x10 <sup>3</sup> lbf.ft
Holding Torque	158.3 kN.m	117 <sup>3</sup> lbf.ft
Static Axial Load Rating	2369 kN	531x10 <sup>3</sup> lbf
Static Radial Load Rating	945 kN	213x10 <sup>3</sup> lbf
Gear Ratio	150:1	
Precision	≤0.17°	
Hydraulic motor performance parameter		
Pressure	6.5 MPa	
Flow	60 L/min	

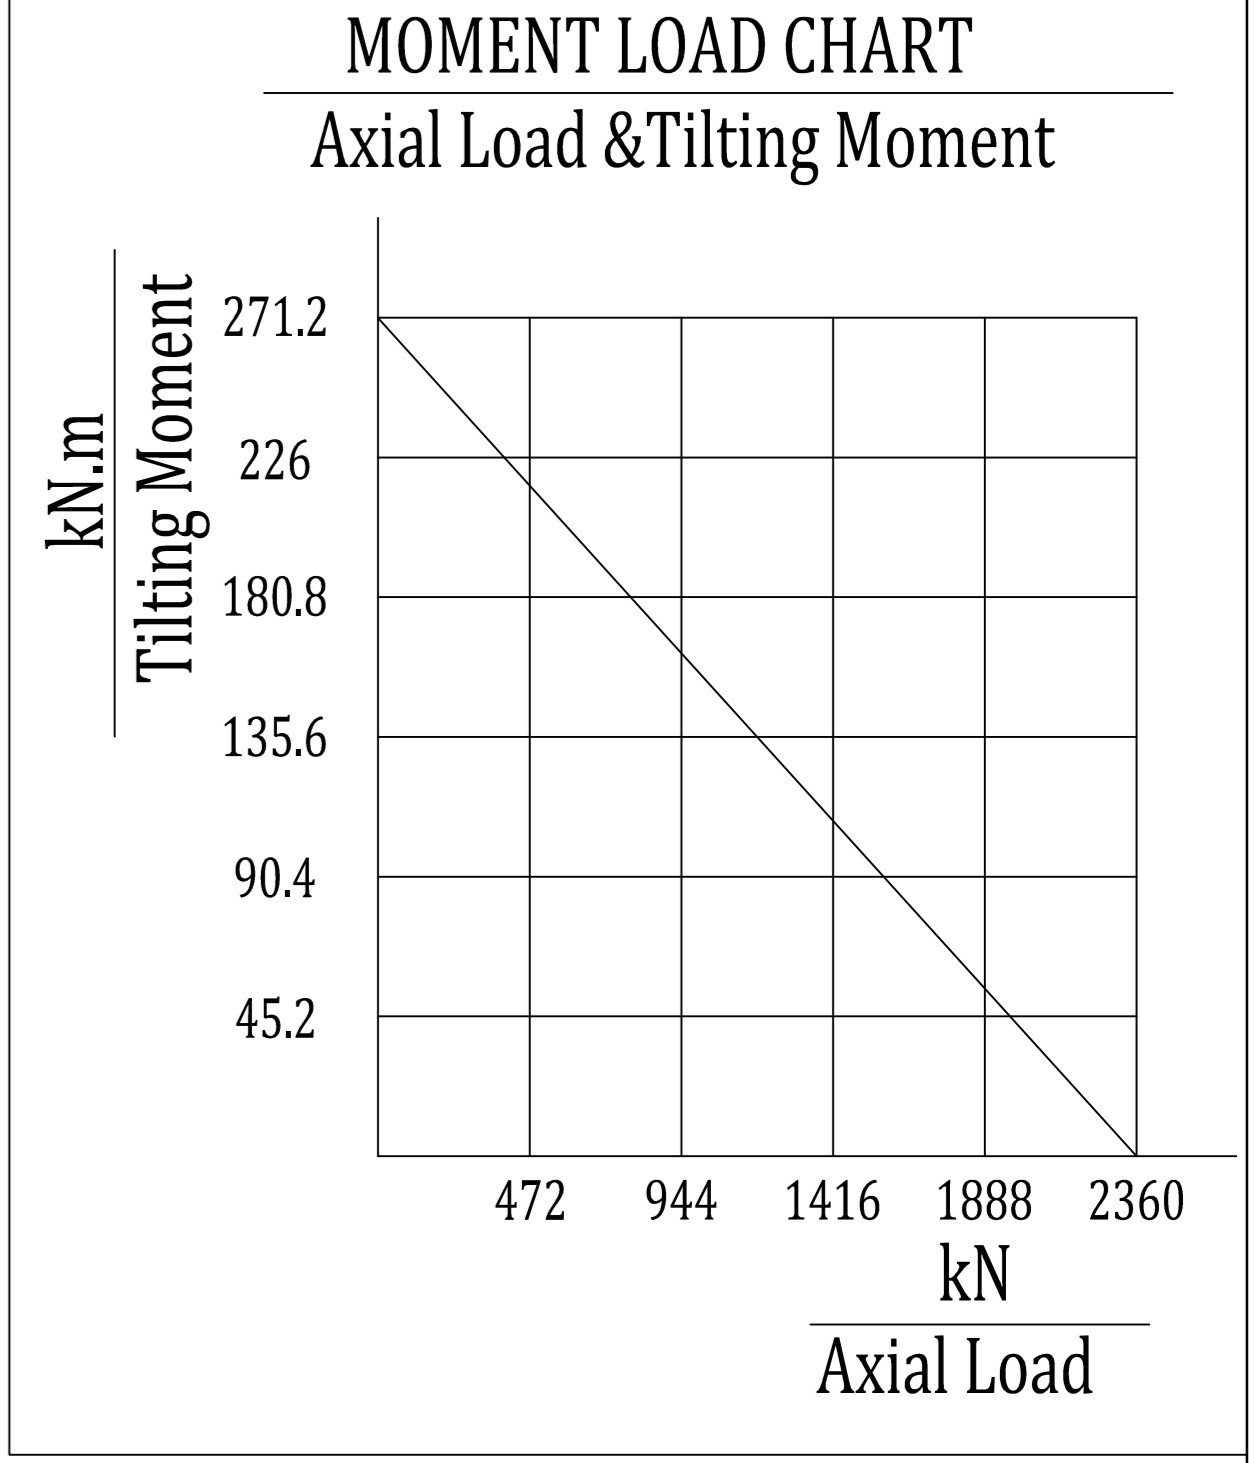

液压马达性能参数  
BMR375 [370 cm<sup>3</sup>/rev.]

压力 (Mpa)      连续最大    断续最大

	3	5	6.5	8	9	13	13.5
10	160	270	340	420	470	550	610
20	159	260	340	410	470	540	605
30	150	255	330	400	450	530	600
40	135	240	310	375	430	520	590
50	120	230	295	360	420	505	570
60	98	210	275	340	390	490	550
70	75	175	250	320	370	465	530
75	65	160	230	310	360	450	515

流量 (L/min)

连续最大  
断续最大

扭矩 (N.m) 600  
速度 (rpm) 60

REV	DATE	REVISER	REVISER	
DESIGNED BY	2019/8/1	Li Ming	 www.coresundrive.com Coresun Drive Equipment Changzhou Co., Ltd.	
CHECKED BY	2019/8/1	Rui Wang		
APPROVED BY	2019/8/1	Shane Zhang		
ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HERE OF ARE RESERVED, AND NO PERMISSION IS GRANTED OR TO DISCLOSE REPRODUCE THIS PRINT IN WHOLE OR IN PART, ANY OF THE INFORMATION TO OTHERS.			WEIGHT	SCALE
SYMBOLE ISO			98 kg	1:4
			SIZE	A3
			SHEET	1/1
				<b>Slewing Drive</b>
				SC25-150-RH-375A
				REV A