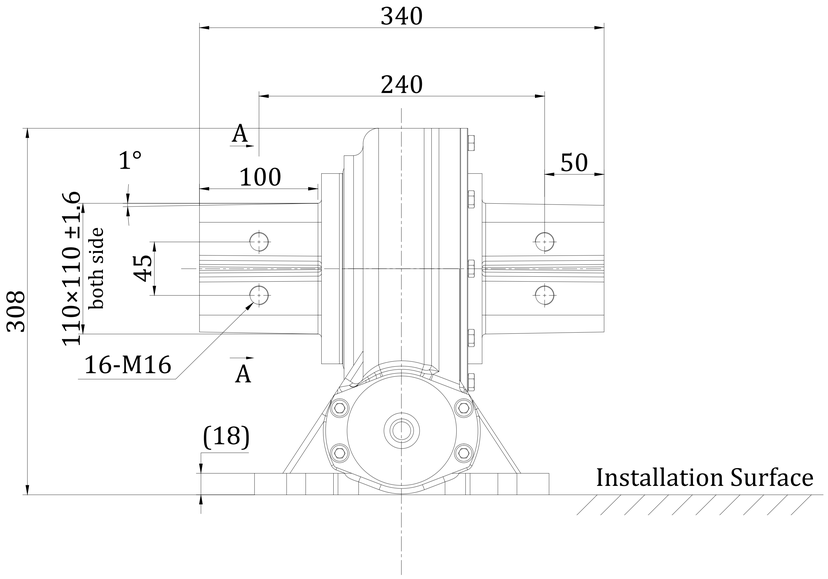

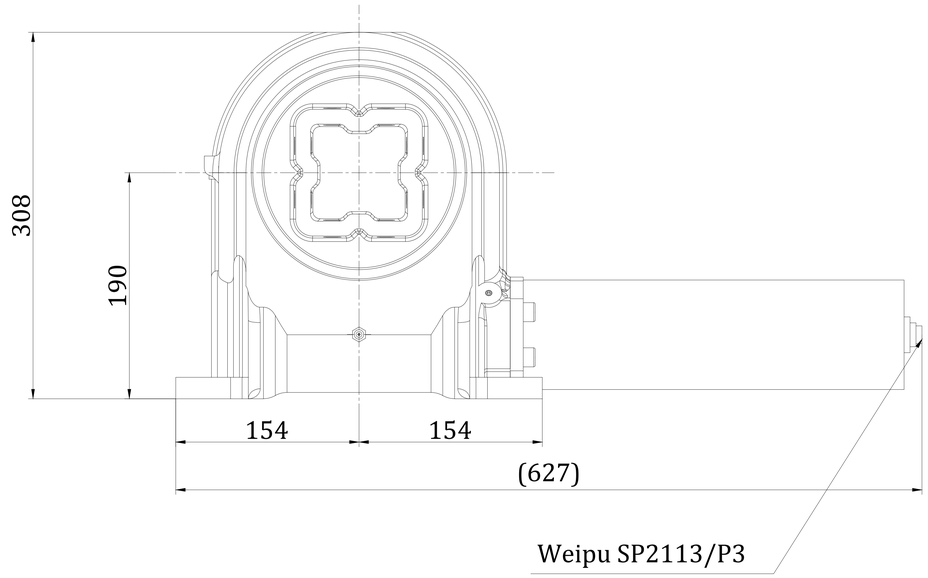

Slewing Drive Performance Parameters	
Rated Output Speed	0.02 rpm
Rated Output Torque	6000 N.m
Output Torque (MAX)	9000 N.m
Tilting Moment	12 kN.m
Holding Torque	50 kN.m
Static Axial Rating	128 kN
Static Radial Rating	72 kN
Dynamic Axial Rating	64 kN
Dynamic Radial Rating	48 kN
Gear Ratio	60 : 1
Hard Limit	±60°
Corrosion Protection	C4 (H)
IP Class	IP65
Temperature	-30°C~+70°C
Precision	≤ 0.2 °
24VDC Motor Performance Data	
Rated Output Torque	250 N.m
Rated Output Speed	1.2 rpm
IP Class	IP 65
Rated Current	≤5A

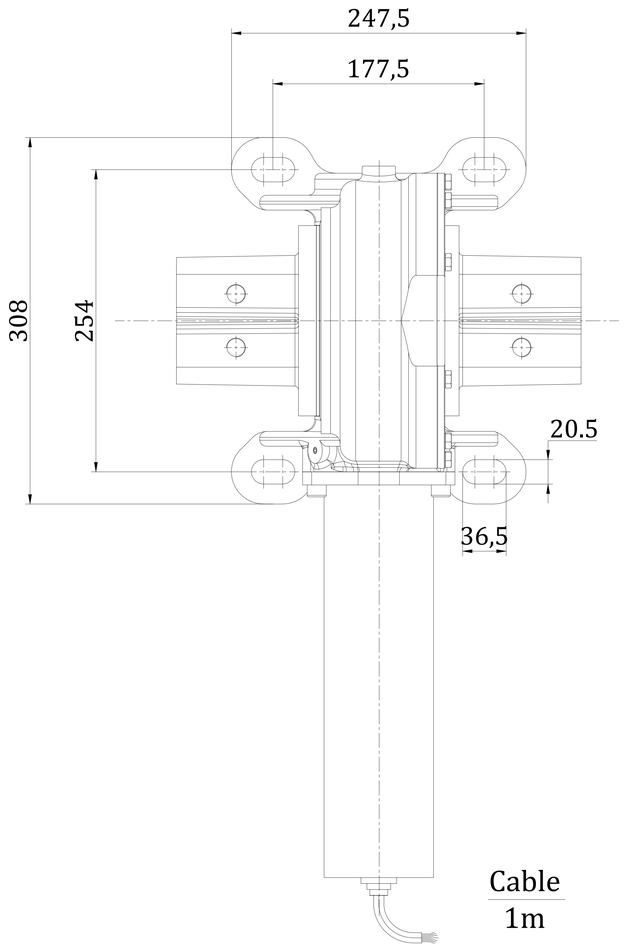

Wire Define		
Pin 1	(black)	motor -
Pin 2	(red)	motor +
Pin E	(green)	Ground

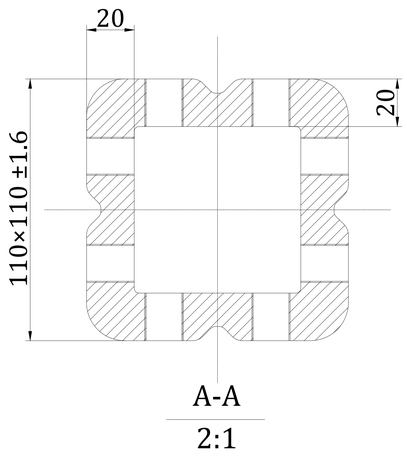

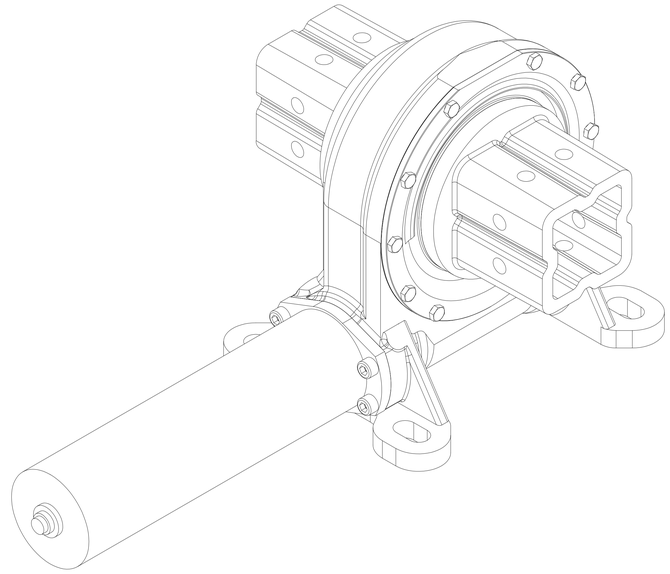

REV	DATE	REVISER	REVISER
DESIGNED BY	2020/8/28	Li Ming	www.coresundrive.com
CHECKED BY	2020/8/28	Yin Qindian	Coresun Drive Equipment Changzhou Co.,Ltd.
APPROVED BY	2020/8/28	Shane Zhang	

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HERE OF ARE RESERVED, AND NO PERMISSION IS GRANTED OR TO DISCLOSE REPRODUCE THIS PRINT IN WHOLE OR IN PART, ANY OF THE INFORMATION TO OTHERS.

WEIGHT	SCALE	Slewing Drive	
58 kg	1 : 5		
SIZE	A3	VH8-60S110-RC-24CS02-A402	REV
SHEET	1 / 1		A

SYMBOLE ISO